



Advanced Card Systems Ltd.
Card & Reader Technologies

ID TECH
IDENTITY AND SECURITY

ACR122U USB NFC Reader



Technical Specifications V3.02

ID TECH SOLUTIONS PVT. LTD

B4/156, 2nd Floor, Safdarjung Enclave, New Delhi -110029

Ph: 91-11-41650260, 91-11-26186361

Visit us at: www.idsolutionsindia.com Email: info@idsolutionsindia.com



An ISO 9001:2008 Certified Company



Table of Contents

1.0. Introduction	3
2.0. Features	4
3.0. Typical Applications.....	5
4.0. Technical Specifications	6



1.0. Introduction



The ACR122U is a PC-linked contactless smart card reader/writer developed on the 13.56 MHz contactless technology. It is the world's first CCID-compliant contactless card reader/writer that follows both ISO 14443 and ISO 18092. This device is designed to support not only Mifare and ISO 14443 Type A and B cards, but also FeliCa and NFC tags.

By making use of up to 424 kbps for NFC tag access and full USB speed of up to 12 Mbps, ACR122U can read and write faster, and more efficiently. Furthermore, ACR122U is also PC/SC-compliant which allows interoperability across different applications and platforms. You can experience the convenience in using ACR122U, with its compact size and the various features it offers, for applications such as payment, access control, time and attendance, and mass transit.



2.0. Features

- USB 2.0 Full Speed Interface
- CCID Compliance
- Smart Card Reader:
 - Read/Write speed of up to 424 kbps
 - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
 - Support for ISO 14443 Part 4 Type A and B cards, Mifare, FeliCa, and all four types of NFC (ISO/IEC 18092 tags)
 - Built-in anti-collision feature (only one tag is accessed at any time)
- Application Programming Interface:
 - Supports PC/SC
 - Supports CT-API (through wrapper on top of PC/SC)
- Built-in Peripherals:
 - User-controllable bi-color LED
 - User-controllable buzzer
- Supports Android™ OS 3.1 and above
- Compliant with the following standards:
 - ISO 14443
 - CE
 - FCC
 - KC
 - VCCI
 - PC/SC
 - CCID
 - Microsoft WHQL
 - RoHS




3.0. Typical Applications

- e-Government
- e-Banking and e-Payment
- e-Healthcare
- Transportation
- Network Security
- Access Control
- Loyalty Program





4.0. Technical Specifications

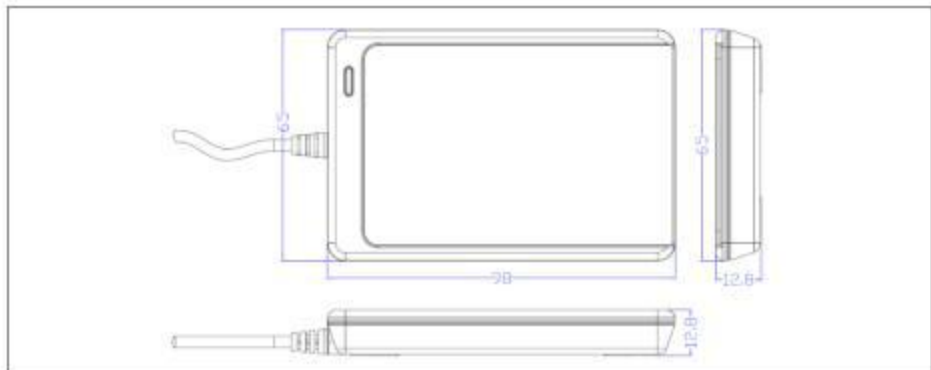

Universal Serial Bus Interface

Power Source.....	From USB
Speed.....	12 Mbps (Full Speed)
Supply Voltage.....	Regulated 5 V DC
Supply Current	200 mA (maximum); 50 mA (standby); 100 mA (normal)

Contactless Smart Card Interface

Standard	ISO/IEC 18092 NFC, ISO 14443 Type A & B, Mifare, FeliCa
Protocol.....	FeliCa protocol, T=CL protocol
Operating Frequency	13.56 MHz
Operating Distance	Up to 50 mm (depending on tag type)
Smart Card Read/Write Speed.....	106 kbps, 212 kbps, 424 kbps

Physical Specifications

Dimensions	98.0 mm (L) x 65.0 mm (W) x 12.8 mm (H)
Weight.....	70 g
Material.....	Polycarbonate (PC)
Color.....	Pearl White
Antenna Size.....	50 mm x 40 mm
Cable Length.....	1.0 m (USB)

Built-In Peripherals

Bi-Color LED	Bi-color LED, red and green
Buzzer.....	Monotone

Operating Conditions

Temperature.....	0 – 50 °C
Humidity.....	10% - 90%

Application Programming Interface

PC/SC	
CT-API (through wrapper on top of PC/SC)	

Certifications/Compliance

ISO 14443, CE, FCC, KC, VCCI, PC/SC, CCID, RoHS, USB Full Speed
Microsoft® WHQL 2000, XP, Vista, 7, 8, Server 2003, Server 2008, Server 2008 R2, Server 2012

Device Driver Operating System Support

Windows® 98, ME, 2000, XP, Vista, 7, 8, Server 2003, Server 2008, Server 2008 R2, Server 2012, Windows® CE 5.0 and 6.0, Linux, Mac, Android™ 3.1 and above

